

VideoWall ActiveLine LVW-Series



178°
Wide viewable angle



With clear display performance in any viewing angle.

Wide viewing angle extension technology to make sure display with non-deformation and non-distortion.



VideoWall ActiveLine LVW-Series



◀ Remote control



Intelligent stitching software, can support remote control video wall by RS232 port, support multi OS, easy to use.

▶ Multi-type stitching way

Support vertical and horizontal stitching way, to match different demand.

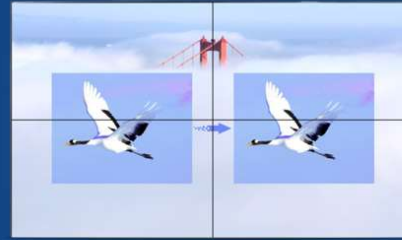

◀ Image roam

Single signal can display on anywhere in screen.

▶ Image stretching

Support stretch image to whole video wall from unit screen.



◀ One screen one display



Every screen can display different contents.

▶ Full screen one display

Complete video wall can display one complete image.



VideoWall ActiveLine LVW-Series

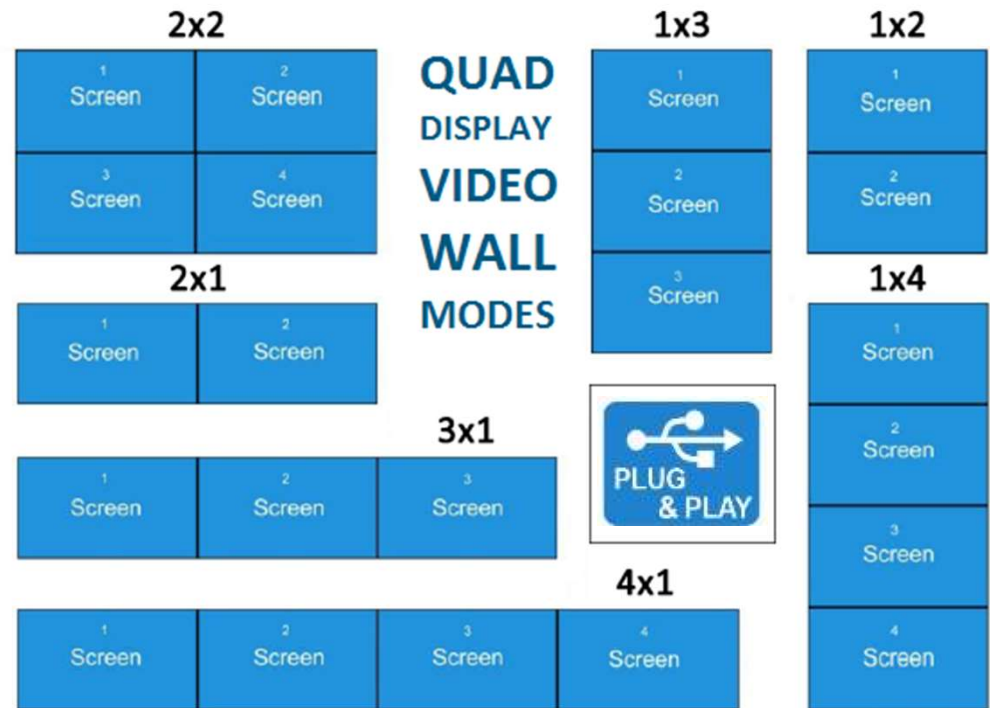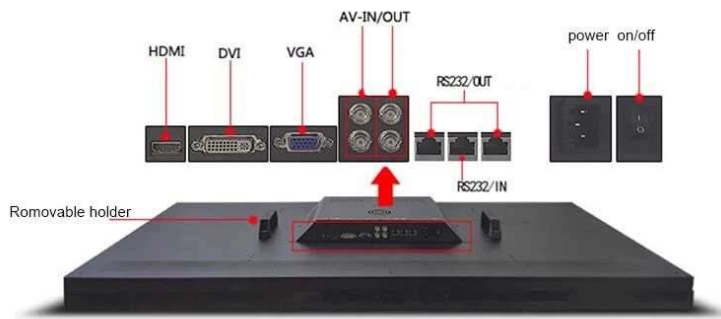

VideoWall ActiveLine

LVW-Series



LCD Size	46"	46"	46"	47"	49"	49"	55"
Resolution	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px
Brightness	700cd/m ² (typ.)	700cd/m ² (typ.)	500cd/m ² (typ.)	450cd/m ² (typ.)	500cd/m ² (typ.)	450cd/m ² (typ.)	700cd/m ² (typ.)
Contrast Ratio	4000:1 (typ.)	3500:1 (typ.)	3500:1 (typ.)	1200:1 (typ.)	1300:1 (typ.)	1300:1 (typ.)	4000:1 (typ.)
Viewable angle	178°(H)/178°(V)						
Solution	TSUM V59						
Voltage	100~240V,50~60Hz						
Consumption	<170W	<170W	<130W	<130W	<130W	<150W	<220W
Standby	<0.5W						
USB Port	1						
HDMI Input	1						
DVI Input	1						
VGA Input	1						
BNC In	1						
BNC Out	1						
RS 232	RS232-IN x 1;RS232-OUT x 1						
Product size	1022 x 574.6 x 134	1022 x 576.6 x 120.8	1022 x 576.6 x 120.8	1045.1 x 590.2 x 108	1075.6 x 605.8 x 108	1077.6 x 607.8 x 108	1213.5 x 684.3 x 128
Net Weight	19±1kg	19±1kg	19±1kg	20±1kg	20,5±1kg	20,5±1kg	23,0±1,0 kg
Frame and color	Metal+Plastic,Black						



VideoWall ActiveLine

LVW-Series



LCD size	55"	55"	55"	55"	55"	55"	55"
Resolution	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px	1920 x 1080px
Brightness	500cd/m²(typ.)	700cd/m²(typ.)	500cd/m²(typ.)	700cd/m²(typ.)	500cd/m²(typ.)	700cd/m²(typ.)	500cd/m²(typ.)
Contrast Ratio	4000 : 1(typ.)	1400:1(typ.)	1400:1(typ.)	1400:1(typ.)	1400:1(typ.)	4000:1(typ.)	3500:1(typ.)
Viewable angle	178°(H)/178°(V)						
Solution	TSUMV59						
Voltage	100~240V,50~60Hz						
Consumption	< 170W	< 220W	< 170W	< 220W	< 170W	< 220W	< 170W
Standby	< 0.5W						
USB Port	1						
HDMI Input	1						
DVI Input	1						
VGA Input	1						
BNC In	1						
BNC Out	1						
RS 232	RS232-IN x 1;RS232-OUT x 1						
Product size	1213.5x684.3x128	1211.5x 682.3x112	1211.5x682.3x112	1213.4x684.2x116.3	1213.4 x684.2x 116.3	1213.45x 684.3x128	1213.5x684.3x128
Net Weight	23.0±1.0 kg	25±1.0 kg	23.0±1.0 kg	21.5±1kg	21.5±1kg	23.5±1kg	23.0±1.0 kg
Frame and color	Metall+Plastic,Black						

