

Short Throw Projector TP-340i

SMART CLASSROOM
By Train Aid Global Sdn Bhd



01 LANGUAGE SELECTION

The presentation of information is available in 19 languages

02 LOW NOISE

In eco-mode, the noise level is kept under 29dB. It runs quietly and leaves the presentation undisturbed

03 CUSTOMIZED SETTING

The startup picture can be changed into any images you want.

04 VARIOUS DISPLAY MODES


- (1) Multiple picture modes like action, cinema, standard, blackboard and color mode
- (2) Aspect ratio available in both 16:9 and 4:3 to satisfy different kinds of screen

05 OPERATING TIME CHECK FOR LAMPS AND FILTER

Allows the user to keep track of the lamp and filter usage for better maintenance

06 SHORT THROW

The short throw projector can show an image of 80° (diagonal) in a distance of 1m, which allows the audience to enjoy a spectacular projection in a small room

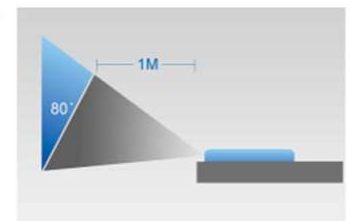

TECHNICAL PARAMETERS

Display Panel	0.55" DLP Panel	
Resolution	XGA(1024 X768Pixels)	
Brightness	4000 Lumens	
Contract Ration	13000:1	
Screen Size	30-300Inch	
Lamp consumption	260W	
Input	D-Sub15- Pin 2, S-Video x1, Video x1,Audio Input(3.5 mm Stereo mini Hole) *1,MIC*1, HDMIx1	
Output	D-Sub15 Pin-1 ,Audio*1	
Control	RS-232 x1, USB- B x1 (Supportfirmware update, remote control by Mouse)	
Keystone	Vertical correction $\pm 40^{\circ}$	
Video Compatibility	NTSC/ NTSC4.43 / PAL(Include PAL-M, N)SECAM/ PAL-60 YUV: 480i/p(525i/p), 576i/p(625i/p), 720p(750p), 1080i/p(1125i/p60Hz) 1080i/p(1125i/p50Hz)	
Scanning Frequency	15- 105 KHz	
Horizontal Frequency	50- 120 Hz	
Vertical Frequency		
Environment	Working:	Storage:
	Temp:0 ° C to 40° C Humidity:10%-80%	Temp:-20 °C to 60° C Humidity: 30%-85%
Lamp Life	4000 Hours(Normal Mode), 6000 Hours(Eco Mode)	
Power supply	AC100-240V, 50-60 Hz, 3.5A	
Consumption	Normal,350W Standby:0.5W	
Weight	3.5Kg (Projector) 6 Kg (Including the projector and carton)	

